

# UTC AN6651 LINEAR INTEGRATED CIRCUIT


## MOTOR SPEED CONTROL CIRCUIT

### DESCRIPTION

The UTC AN6651 is a monolithic integrated circuit designed for the rotating control of a compact DC motor which is used for a tape recorder, recorder player etc.


### FEATURES

- \*Wide operating supply voltage:  $V_{cc}=3.5V \sim 14.4V$
- \*Small four-lead plastic packer for compact motor.
- \*Few external components
- \*Stable low reference voltage (1.0V, typical)
- \*Wide motor speed setting
- \*Reverse voltage protection circuit built-in

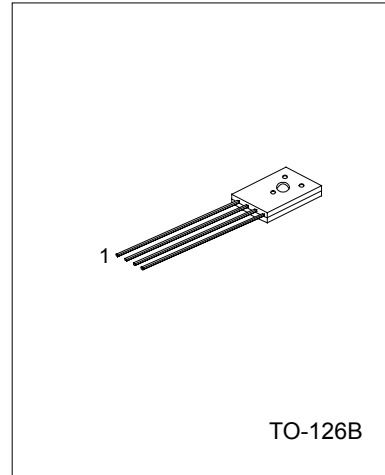

1: Vcc 2: CONTROL 3: GND 4: MOTOR

### BLOCK DIAGRAM

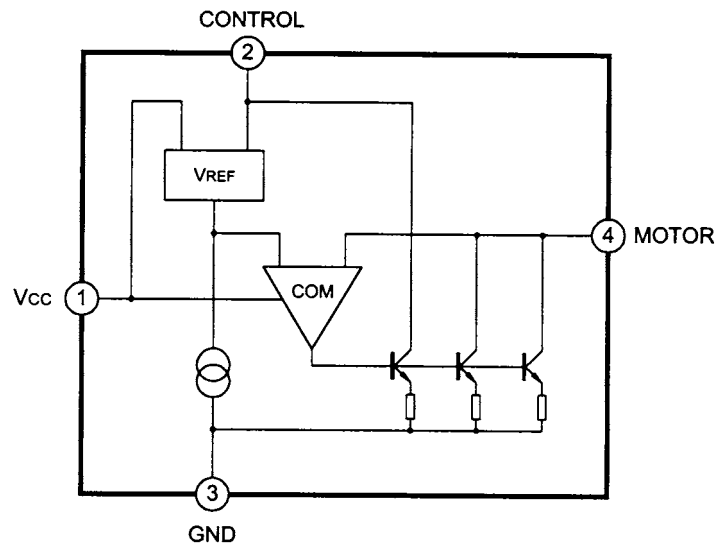

# UTC AN6651 LINEAR INTEGRATED CIRCUIT

## ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	V <sub>CC</sub>	14.4	V
Supply Current (note 1)	I <sub>CC</sub>	2000	mA
Power Dissipation (Ta=25°C) (note 2)	P <sub>D</sub>	1300	mW
Operating Temperature	T <sub>OPR</sub>	-20 to +75	°C
Storage Temperature	T <sub>STG</sub>	-40 to +150	°C
Terminal Voltage	V <sub>n-3</sub> (n=1,2,4)	-0.5 to +14.4	V
Terminal Current	I <sub>1</sub>	150	mA
Terminal Current	I <sub>2</sub>	100	mA
Terminal Current (note 1)	I <sub>3</sub>	-2000 (MIN.)	mA
Terminal Current (note 1)	I <sub>4</sub>	1750	mA

Note 1: t ≤ 5 sec

Note 2: Ta=25°C, with a 10 x 10 mm bakelite PCB (3.5μm Cu leaf)


## ELECTRICAL CHARACTERISTICS (Ta=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference Voltage	V <sub>ref</sub>	V <sub>CC</sub> =6V, Ra=1kΩ	0.85	1.00	1.15	V
Base Current	I <sub>bias</sub>	V <sub>CC</sub> =6V		0.8	1.8	mA
Current Proportional Constant	K	V <sub>CC</sub> =6V, ΔI4=40mA	35	40	45	
Saturation Voltage	V <sub>SAT</sub>	V <sub>CC</sub> =4.2V, Ra=5.0Ω		1.15	2.0	V
Voltage Characteristics 1	$\frac{\Delta V_{REF}}{V_{REF}} / \Delta V_{CC}$	V <sub>CC</sub> =3.5V~14V Ra=1kΩ		-0.1		%/V
Voltage Characteristics 2	$\frac{\Delta K}{K} / \Delta V_{CC}$	V <sub>CC</sub> =3.5V~14V ΔI4=40mA		0.2		%/V
Current Characteristics 1	$\frac{\Delta V_{REF}}{V_{REF}} / \Delta I4$	I4=50mA~200mA		-0.02		%/mA
Current Characteristics 2	$\frac{\Delta K}{K} / \Delta I4$	I4=50mA~200mA		-0.01		%/mA
Temperature Characteristics 1	$\frac{\Delta V_{REF}}{V_{REF}} / \Delta T_a$	Ta=-20~+75°C V <sub>CC</sub> =6V Ra=1kΩ		0.01		%/°C


# UTCAN6651 LINEAR INTEGRATED CIRCUIT

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Temperature Characteristics 2	$\frac{\Delta K}{K \Delta T_a}$	$T_a = -20 \sim +75^\circ\text{C}$ $\Delta I_4 = 40\text{mA}$		0.01		%/ $^\circ\text{C}$

## CHARACTERISTICS CURVE

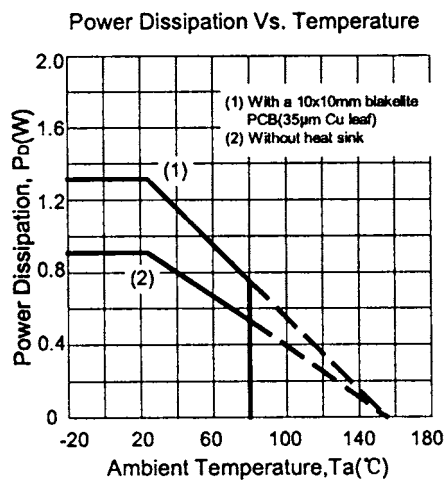

## APPLICATION CIRCUIT

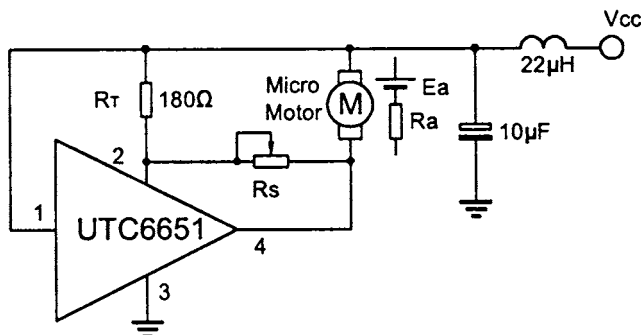

Motor Constant:

$K_a$ — Electromotive force constant=1.1mV/rpm

$R_a$ — Internal Resistor=5 $\Omega$

$K_T$ =Torque Constant=100g.cm/A

# UTC AN6651      LINEAR INTEGRATED CIRCUIT

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.