

DATA SHEET

BGY120A; BGY120B; BGY120D UHF amplifier modules

Objective specification
File under Discrete Semiconductors, SC09

1996 May 29

UHF amplifier modules

BGY120A; BGY120B; BGY120D

FEATURES

- Single 3.6 V nominal supply voltage
- 1.2 W output power
- Easy control of output power by DC voltage
- Very high efficiency (typ. 55%)
- Silicon bipolar technology
- Standby current less than 100 μ A.

APPLICATIONS


- Hand-held transmitting equipment operating in the 824 to 849 MHz, 872 to 905 MHz and 898 to 928 MHz frequency ranges.

DESCRIPTION

The BGY120A, BGY120B, and BGY120D are three-stage UHF amplifier modules in a SOT388A package. Each module consists of three NPN silicon planar transistor dies, mounted together with matching and bias components on a metallized ceramic substrate. The modules produce an output power of 1.2 W into a load of 50 Ω with an RF drive power of 2 mW.

PINNING - SOT388A

PIN	DESCRIPTION
1	RF input
2	V_C
3	V_S
4	RF output
Flange	ground

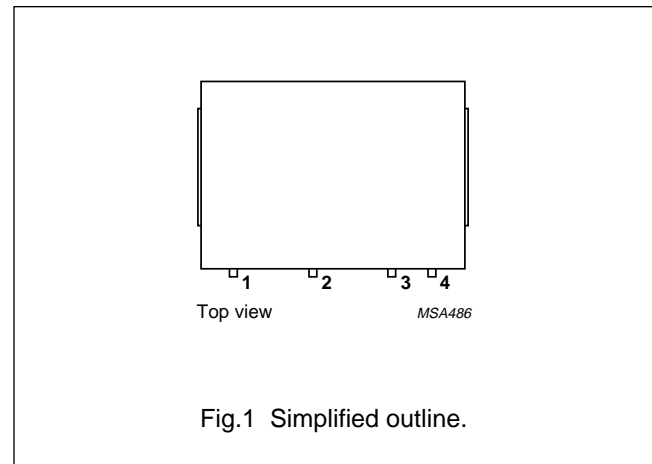

QUICK REFERENCE DATA

RF performance at $T_{mb} = 25$ °C.

TYPE NUMBER	MODE OF OPERATION	f (MHz)	V_S (V)	P_L (W)	G_p (dB)	η (%)	$Z_S; Z_L$ (Ω)
BGY120A	CW	824 to 849	3.6	1.2	≥ 27.8	typ. 55	50
BGY120B	CW	872 to 905	3.6	1.2	≥ 27.8	typ. 55	50
BGY120D	CW	898 to 928	3.6	1.2	≥ 27.8	typ. 55	50

UHF amplifier modules

BGY120A; BGY120B;
BGY120D**LIMITING VALUES**

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V_S	DC supply voltage	–	5.5	V
V_C	DC control voltage	–	3.5	V
P_D	input drive power	–	5	mW
P_L	load power	–	1.6	W
T_{stg}	storage temperature	–40	+100	°C
T_{mb}	operating mounting base temperature	–30	+100	°C

CHARACTERISTICS $Z_S = Z_L = 50 \Omega$; $P_D = 2 \text{ mW}$; $V_S = 3.6 \text{ V}$; $V_C \leq 3 \text{ V}$; $T_{mb} = 25 \text{ °C}$; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
f	frequency					
	BGY120A		824	–	849	MHz
	BGY120B		872	–	905	MHz
	BGY120D		898	–	928	MHz
I_Q	total quiescent current	$V_C = 0$; $P_D < -60 \text{ dBm}$	–	–	100	μA
I_C	control current	adjust V_C for $P_L = 1.2 \text{ W}$	–	–	500	μA
P_L	load power		1.2	–	–	W
G_p	power gain	adjust V_C for $P_L = 1.2 \text{ W}$	27.8	–	–	dB
η	efficiency	adjust V_C for $P_L = 1.2 \text{ W}$	50	55	–	%
H_2	second harmonic	adjust V_C for $P_L = 1.2 \text{ W}$	–	–	–40	dBc
H_3	third harmonic	adjust V_C for $P_L = 1.2 \text{ W}$	–	–	–40	dBc
V_{SWR}_{in}	input VSWR	adjust V_C for $P_L = 1.2 \text{ W}$	–	–	3 : 1	
	stability	$P_D = 0$ to +6 dBm; $V_S = 3$ to 4.8 V; $V_C = 0$ to 3 V; $P_L \leq 1.2 \text{ W}$; $V_{SWR} \leq 6 : 1$ through all phases	–	–	–60	dBc
	isolation	$V_C = 0$	–	–	–40	dBm
P_n	noise power	adjust V_C for $P_L = 1.2 \text{ W}$; bandwidth = 30 kHz; $f_n = f_o + 45 \text{ MHz}$	–	–	–90	dBm
	ruggedness	$V_S = 4.8 \text{ V}$; adjust V_C for $P_L = 1.4 \text{ W}$; $V_{SWR} \leq 10 : 1$ through all phases	no degradation			

UHF amplifier modules

BGY120A; BGY120B;
BGY120D

SOLDERING

The indicated temperatures are those at the solder interfaces.

Advised solder types are types with a liquidus less than or equal to 210 °C.

Solder dots or solder prints must be large enough to wet the contact areas.

Footprints for soldering should cover the module contact area +0.1 mm on all sides.

Soldering can be carried out using a conveyor oven, a hot air oven, an infrared oven or a combination of these ovens.

Hand soldering must be avoided because the soldering iron tip can exceed the maximum permitted temperature of 250 °C and damage the module.

The maximum temperature profile and soldering time is indicated as follows (see Fig.2):

- t = 350 s at 100 °C
- t = 300 s at 125 °C
- t = 200 s at 150 °C
- t = 100 s at 175 °C
- t = 50 s at 200 °C
- t = 5 s at 250 °C (maximum temperature).

Cleaning

The following fluids may be used for cleaning:

- Alcohol
- Bio-Act (Terpene Hydrocarbon)
- Triclean B/S
- Acetone.

Ultrasonic cleaning should not be used since this can cause serious damage to the product.


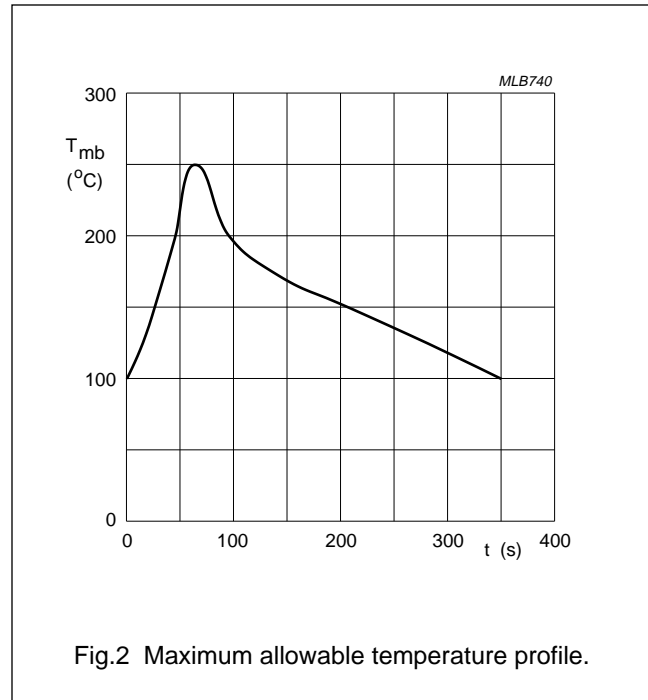


Fig.2 Maximum allowable temperature profile.

UHF amplifier modules

BGY120A; BGY120B;
BGY120D

PACKAGE OUTLINE

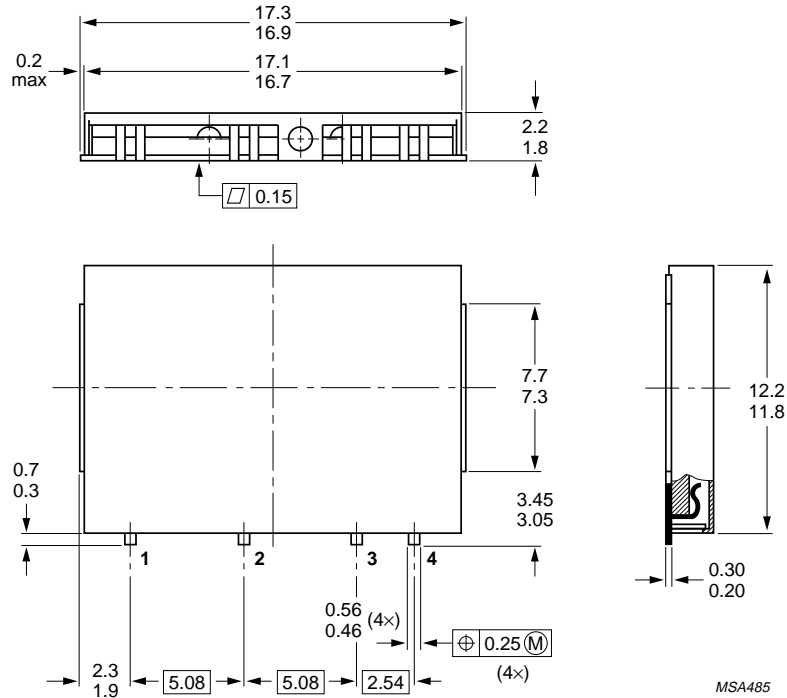

Dimensions in mm.

Fig.3 SOT388A.

UHF amplifier modules

BGY120A; BGY120B;
BGY120D**DEFINITIONS**

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.